



FAIRING MOUNTED TEARDROP MIRRORS

1810

Thank You For Choosing Kuryakyn!

Protect yourself and others from potential injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

WARNING

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

NOTICE

This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality or damage the product itself or the product to which it is being attached.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 1 Right Mirror Mount
- 1 Left Mirror Mount
- 1 Right Mirror Head
- 1 Left Mirror Head
- 1 Cardboard Template
- 2 3/8-16 X 1" Socket Head Cap Screws
- 2 Flat Washers
- 1 Right Spacer
- 1 Left Spacer
- 1 Installation Instructions

YOU WILL ALSO NEED:

Set of Torx drivers, set of hex wrenches, set of combination wrenches, center punch, drill and sharp drill bits, and masking tape.

NOTICE

These installation instructions contain important information. Ensure that the end user receives this copy and is aware of its importance for future use.

- STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn **IGN OFF**. Remove the main fuse.

WARNING

THE END USER'S SAFETY DEPENDS UPON PROPER INSTALLATION OF THIS PRODUCT. IF A STEP IN THESE INSTRUCTIONS IS NOT WITHIN YOUR CAPABILITIES OR YOU DO NOT HAVE THE CORRECT TOOLS, HAVE YOUR DEALER PERFORM THE PROCEDURE. IMPROPER INSTALLATION OF THIS PRODUCT COULD RESULT IN DEATH OR SERIOUS INJURY.

ACCIDENTAL VEHICLE START-UP COULD CAUSE DEATH OR SERIOUS INJURY, REMOVE THE MAIN FUSE BEFORE PROCEEDING.

NOTICE

Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.

- STEP 2** Remove the outer fairing and windshield; disconnect the headlight; set it all on a soft, sturdy surface.

NOTE: For bikes with existing mirrors, skip to **STEP 6** otherwise continue on to **STEP 3**.

STEP 3 Locate the included Template; locate the bosses shown in PIC 1.

STEP 4 Align the template as shown in PIC 1; note the perforated marks on the template; use a center punch to make marks on the inside of the fairing. Repeat for the other side.

NOTICE

MEASURE TWICE—DRILL ONCE. Double check all reference marks made on the ? **BEFORE** drilling. Kuryakyn is not responsible for incidental or consequential damages resulting from this installation.

STEP 5 From the inside of the fairing, drill small pilot holes at the marks made in the previous **STEP**.

Place some masking tape over the pilot holes on the outside of the fairing.

From the outside of the fairing, enlarge the TOP pilot holes to 3/8"; enlarge the BOTTOM holes to 1/4". Remove and discard the tape. **SKIP TO STEP 7.**

STEP 6 Remove the existing mirrors and hardware; set them aside, they will not be re-used.

STEP 7 Locate the included Screws and Washers; assemble the Washers and Screws; set them within arm's reach of the work area.

Refer to PIC 2. Locate the included Left and Right Spacers; set them within arm's reach of the work area.

STEP 8 Locate the included Mirror Mounts; hold the Left Mount up to the outside of the fairing as shown in PIC 3; insert the Mount locating-boss through the bottom fairing-hole.

STEP 9 Place the Left Spacer (with the angled side facing inward) over the Mount locating-boss; align the holes.

STEP 10 Insert the Screw with Washer through the Spacer; thread the Screw into the Mount; tighten the Screw.





STEP 11 Repeat **STEPS 8 through 10** for the other side.

STEP 12 Locate and thread the included Left Mirror Head into the Mount (the text should be on the bottom); repeat for the other side

STEP 13 Use an open end wrench to tighten the Mirror studs against the Mounts.

STEP 14 Adjust the Mirrors before riding.

STEP 15 Reconnect the headlight; reinstall the outer fairing; reinstall the main fuse. Turn **IGN ON** and ensure that the headlight and other lights operate correctly before riding.

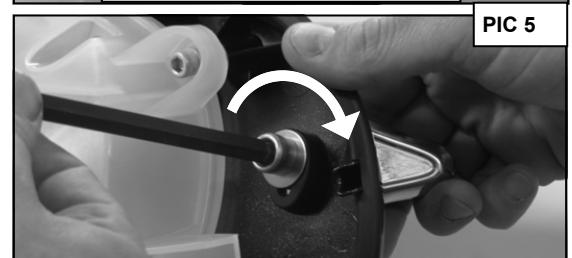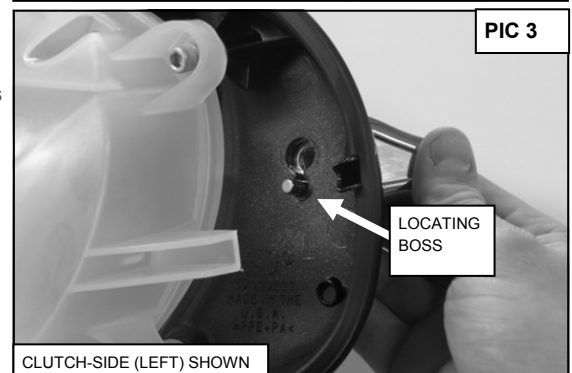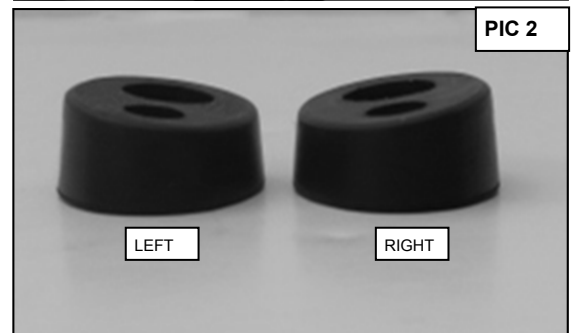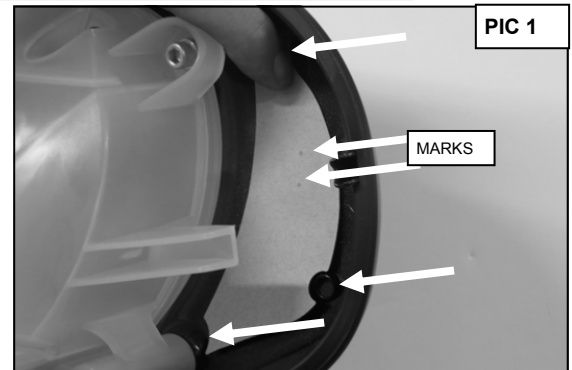



NOTICE

It is the end user's responsibility to ensure that all fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not provide warranty coverage on products or components lost or damaged due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. Merchandise purchased directly from Internet auction sites or any other third party seller is considered sold as is & shall not carry a Kuryakyn warranty. All warranty claims must be directed to the original seller. If unsure please contact the seller to verify they are an authorized Kuryakyn retailer.

RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.