



UNIVERSAL ACCESSORY FUSED TERMINAL BLOCK

2208

PARTS INCLUDED

- 1 Fused Terminal Block
- 1 Hardware Kit Containing:
 - 1 Protective Sleeve
 - 1 12" Nylon Cable Tie
 - 6 4" Nylon Cable Ties
 - 1 Adhesive Hook Pad
 - 1 Adhesive Loop Pad
 - 6 Insulated Fork Terminals
 - 2 Insulated Ring Terminals
 - 1 Alcohol Pad
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND NOTICES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING	THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.
NOTICE	This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.
CAUTION	This indication alerts you to the fact that ignoring the contents described herein can result in potential injury.

NOTICE

IF INSTALLING THIS PRODUCT FOR ANOTHER PARTY, PLEASE MAKE SURE THEY RECEIVE THIS COPY OF THE INSTALLATION INSTRUCTIONS SO THEY ARE AWARE OF THE IMPORTANT INFORMATION CONTAINED IN THEM.

TOOLS SUGGESTED

Wire Stripper, Terminal Crimper, Wire Cutter, Blade Screwdriver

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let cool.

NOTE: This is a UNIVERSAL use accessory. Pictures shown and mounting locations given are suggestions only! It is the installer's responsibility to find a suitable mounting location on each model.

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Küryakyn warrants that any Küryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Küryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
 - Küryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
 - Küryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Küryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Küryakyn and a customer.
- Küryakyn products are often intended for use in specific applications. Küryakyn makes no warranty if a Küryakyn product is used in applications other than intended.
- Küryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Küryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.

- Küryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Küryakyn. Küryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Küryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Küryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Küryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Küryakyn USA® All Rights reserved.



⚠ WARNING YOU WILL BE WORKING AROUND THE ENGINE AND EXHAUST SYSTEM DURING INSTALLATION. ENSURE THAT THE ENGINE AND EXHAUST SYSTEM HAVE FULLY COOLED TO PREVENT INJURY.

⚠ WARNING IT IS THE INSTALLERS RESPONSIBILITY TO ENSURE THAT THE INSTALLATION OF ACCESSORIES TO THE FUSED TERMINAL BLOCK DOES NOT EXCEED **20 AMPS TOTAL**. EXCEEDING THE MAXIMUM ALLOWABLE (**20 AMPS**) AMPERAGE MAY LEAD TO CIRCUIT FAILURE WHICH COULD RESULT IN SERIOUS INJURY OR DEATH.

⚠ WARNING IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT THE ELECTRICAL ACCESSORIES OPERATING AT ONE TIME DO NOT USE MORE CURRENT THAN THE CHARGING SYSTEM CAN SUPPLY. OVERLOADING OF THE CHARGING SYSTEM CAN CAUSE BATTERY DISCHARGE, DAMAGE THE ELECTRICAL SYSTEM ON THE MOTORCYCLE AND LEAD TO CIRCUIT FAILURE. THIS MAY RESULT IN SERIOUS INJURY OR DEATH.

⚠ CAUTION Avoid potential electrical shock! Disconnect the battery before adding or removing accessories from the Fused Terminal Block.


⚠ CAUTION Avoid potential electrical shock and/or potential battery drain! All accessories connected to the Fused Terminal Block are connected directly to the battery and powered at all times! These connected accessories **DO NOT** lose power when the key is turned "OFF".

STEP 2 Locate a suitable mounting location for the Fused Terminal Block. This could be on the frame, under the seat, behind the fairing. We include a 12" nylon cable tie (there is a slot on each side (PIC 1) of the Fused Terminal Block that will allow the cable tie to pass through to secure it) or hook and loop tape to use to secure the Block to your desired location. **DO NOT** secure at this time.

NOTE: Depending on how you decided to secure the Fused Terminal Block to the motorcycle, the optional Protective Sleeve may or may not fully cover the Fused Terminal Block.

STEP 3 **If using the optional protective sleeve:** Thread the wire harness into the protective sleeve. Slide the protective sleeve along the wire harness and over the Fused Terminal Block for now. **With or without the protective sleeve:** Route the wire harness from the Fused Terminal Block in the desired location to the battery. **DO NOT connect to the battery at this time.** Coil up any excess length of wire harness or cut any excess length from the end of the wire harness. If the wire harness is cut, remove approximately wire 1/4" of insulation from the end of each wire. **The insulator on the ring terminal should cover all exposed wire when installed to avoid a potential short.** Attach one of the included ring terminals to each wire.

STEP 4 Open the Fused Terminal Block by pressing the latch on the end in towards the Block. PIC 2 Open the lid far enough so the hooks on the opposite end of the lid free from the slots on the base. PIC 3

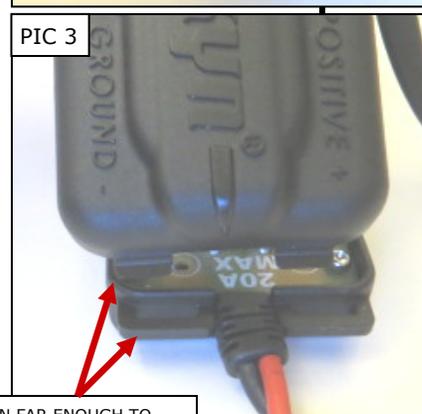

WARNING

IT IS THE INSTALLERS RESPONSIBILITY TO ENSURE THAT THE INSTALLATION OF AN ACCESSORY TO THE FUSED TERMINAL BLOCK DOES NOT EXCEED **THE AMPERAGE FOR THAT FUSE**. PIC 4 EXCEEDING THE MAXIMUM ALLOWABLE AMPERAGE MAY LEAD TO CIRCUIT FAILURE WHICH COULD RESULT IN SERIOUS INJURY OR DEATH.

NOTE: If the wires that you are attaching do not have a forked terminal, cut any excess length from the end of the wire harness. Remove approximately wire 1/4" of insulation from the end of each wire. The insulator on the forked terminal should cover all exposed wire when installed to avoid a potential short. Attach one of the included forked terminals to each wire.

STEP 5 Using the lid as a reference (PIC 4), attach the positive wire forked terminal from the accessory to the positive side of the Fused Terminal Block (also marked on the board with a (+) sign) by loosening the screw at the chosen fuse, sliding the forked terminal under the head and then tightening the screw securely. **(For a proper lid fit, place the wire side of the forked terminal towards the bottom of the Fused Terminal Block PIC 5).** Repeat for the negative wire forked terminal (also marked on the board with a (-) sign) Repeat for each accessory.


NOTE: DO NOT exceed the maximum amperage for each fuse! PIC 4 DO NOT exceed 20 AMPS total to the Fused Terminal Block! PIC 4

NOTE: Double check the polarity of each accessory and the battery leads before connecting the Fused Accessory Terminal Block to the battery!

STEP 6 Once you have connected all the desired accessories to the Fused Terminal Block, replace the lid. Secure the Fused Terminal Block to the desired location. Secure all wiring out of harms way with the included cable ties.

NOTICE Secure all wiring from the newly installed and/or from existing parts, away from any moving parts, pinch points or extreme heat. Küryakyn WILL NOT issue a warranty on any electrical component that fails due to pinched, crimped, broken, abraded, melted or frayed wires.

STEP 7 Attach the ring terminal from the positive (RED) wire from the Fused Terminal Block to the positive side of the battery. Attach the ring terminal from the negative (BLACK) wire from the Fused Terminal Block to the negative side of the battery. Test all accessories.

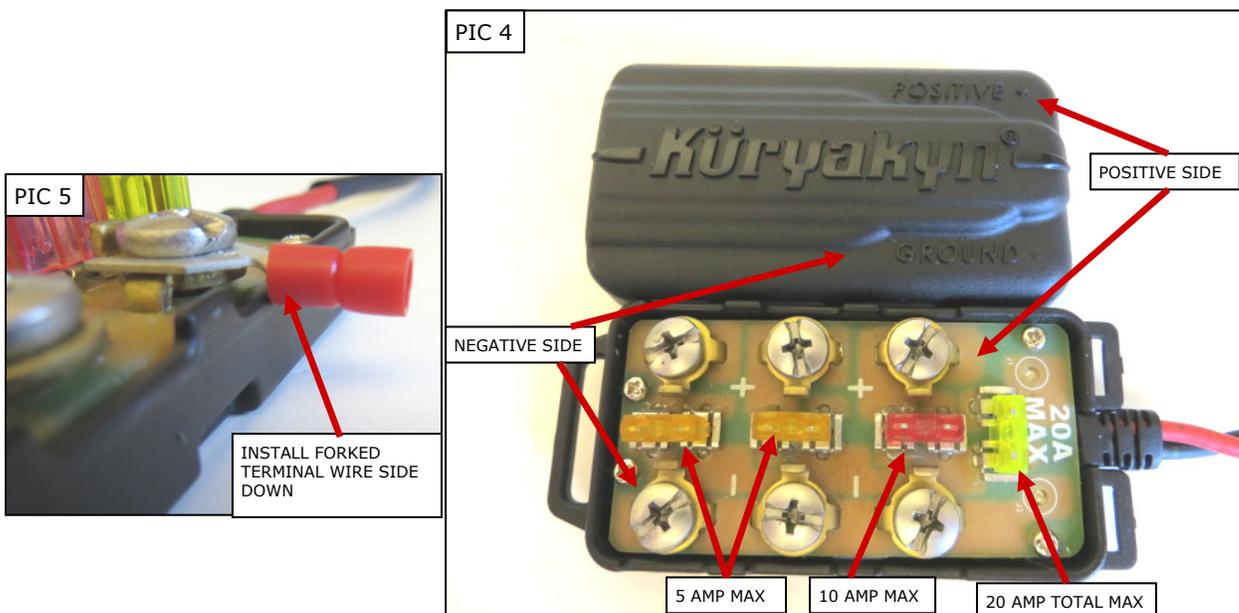

Ride On!