



LICENSE TRIM PANEL With L.E.D. RUN/BRAKE ACCENT 3134

PARTS INCLUDED

- 1 License Plate Trim Panel with L.E.D. Run-Brake Accent Light
- 1 Drill Template
- 1 Hardware Kit Includes the Following Eight Items:
 - 4 Black Neoprene Mounting Cap
 - 4 #10-24 X 5/8" Button Socket Cap Screw
 - 2 #10-24 X 3/8" Button Socket Cap Screw
 - 6 #10 Flat Washer
 - 6 #10 Internal Tooth Lock Washer
 - 1 Six Plug Wire Harness
 - 1 Black Nylon Male Connector Housing
 - 2 Black Nylon Cable Tie, 4"
 - 1 Dielectric Grease
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED


Set of Metric Hex Wrenches, Drill and Drill Bits

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

STEP 2 Remove the license plate from the bracket on the rear center panel.

STEP 3 Remove the five bolts that hold on the center rear panel. Four of the bolts are located at the corners. On older models, there may be a fifth bolt located under the license plate. This center bolt is different than the other four and will not be reused. Remove the panel by pulling out on the bottom and slowly working off. Remove the bracket from the rear panel.

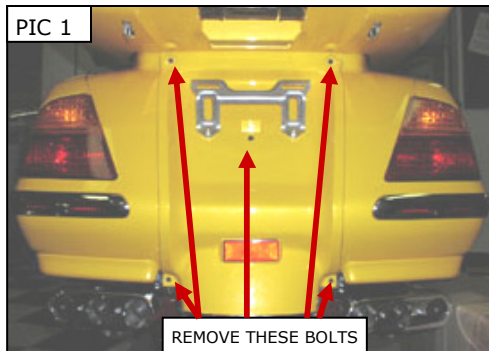

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
 - Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
 - Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Kuryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.

- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Kuryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Kuryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.


Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.




CAUTION! MEASURE TWICE – DRILL ONCE. Double check all reference marks made on the fender center panel **BEFORE** drilling. Kuryakyn will not be responsible for incidental or consequential damages resulting from this installation.


STEP 4 Place the template on the panel paying attention to the up arrow. The two posts on the back of the template will set in the existing license plate holes to correctly align the template. Drill the four corner holes using a 1/4" bit, at the four outside locations. PIC 2 Remove the template.

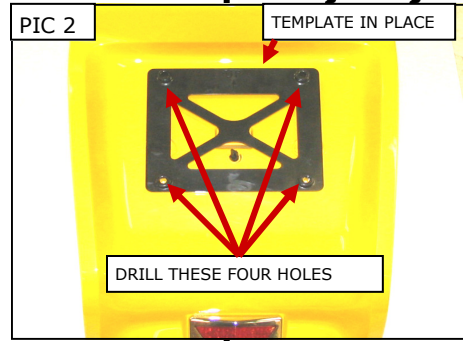

STEP 5 Enlarge the hole, using a 3/8" bit, in the indent location shown in PIC 3.

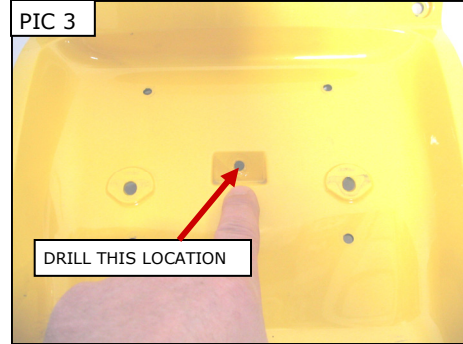


STEP 6 Mount your license plate to the back of the trim using the bracket and proper fasteners. Install the 4 neoprene mounting caps to the threaded posts. PIC 4

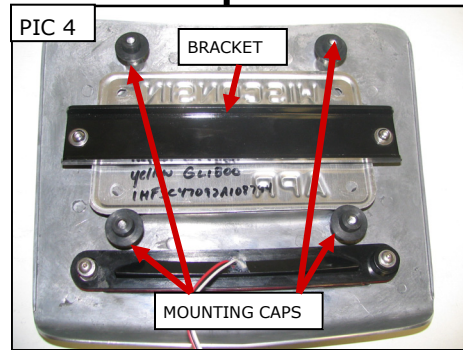

STEP 7 Run the wire from the light through the 3/8" hole that you drilled in STEP 4. Place the trim piece in position and fasten into place using the 4, #10-24 X 5/8" screws and washers.

STEP 8 Locate the blue wire connectors that are behind the removed fender panel and install the supplied wire harness. PIC 5 The two small connectors shown in PIC 6 are where you will be plugging in the light.

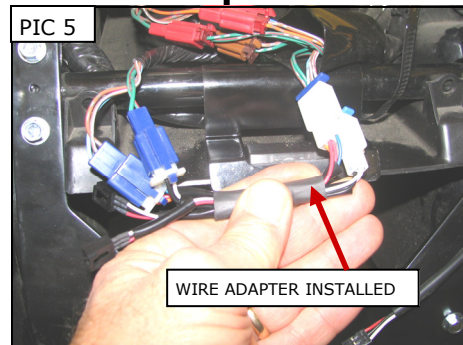

NOTE: If you have already installed additional Kuryakyn accessory lights on the rear of the bike and you do not have an extra plug in you may use Kuryakyn P/N 7302, Multi-Plug and Play Connector, into the existing Kuryakyn wire adapter for additional plug-ins in place of the included wire adapter.

ATTENTION! Kuryakyn recommends the use of dielectric grease on electrical connections.

STEP 9 You are now ready to reinstall the rear center panel. Hold the panel up close enough to the bike so you can plug in the wire connection. Get the panel into place and reinstall the four fasteners.

ATTENTION! Secure all wiring away from any moving parts, pinch points or extreme heat. Kuryakyn **WILL NOT** issue a warranty on any electrical component that fails due to pinched, crimped, broken, abraded, melted or frayed wires.

ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.

