



ZOMBIE INFINITY HORN COVER 7719

FITS: '91-UP H-D MODELS WITH "COWBELL" HORN COVER

CUSTOMER SERVICE 877.370.3604 (toll free)

INSTALLATION QUESTIONS techsupport@kuryakyn.com or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer...

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
• The product must be properly installed, maintained and operated under normal conditions.
• Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
• Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
• Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
• Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
• Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today-select the "CATALOGS" icon. Each Kuryakyn® product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.

PARTS INCLUDED

- 1 Zombie Infinity Horn Cover
1 Hardware Kit Including:
1 Lizard Light Switch/Controller
1 18" Extension for Lizard Light
8 4" Cable Ties
1 Black Bracket
1 Double Female Lizard Light Connector
1 Dielectric Grease Packet
1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KURYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED

Set of Hex Wrenches and Combination Wrenches

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

PROCEDURE

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface; turn off the ignition and allow the engine to cool.

STEP 2 Disconnect the 2 wires from the horn and remove the stock horn assembly from the motorcycle by removing the 5/16" acron nut. Be sure to leave the stock rubber mount in place on the motorcycle.

NOTE Protect painted surfaces. Place a rag or other form of protection down before allowing the horn assembly to rest against the bike. Not protecting could potentially scratch the paint.

-cont.-



**STEP 3** Remove the horn from the stock cowbell horn cover and mount the horn to the bracket included in the kit (PIC 1). Fasten it with the stock nut from the stock cowbell horn cover. (PIC 2)

**STEP 4** Slide the new Zombie Infinity Horn Cover assembly (with horn mounted) onto the horn mount on the bike. Secure with the stock 5/16" Acorn Nut, Flat Washer, and Split Lock Washer.

**STEP 5** Reconnect the horn wires removed in Step 2 and test for correct operation.

## PROCEDURE - LIGHT WIRING

**CAUTION!** Do not operate more than 16 Seven-Color Lizard Lights on one control switch.

**STEP 1** Remove the seat or battery box cover to locate the battery.

**STEP 2** Determine a location on your bike to mount the control switch; clean the area with the included alcohol cleaning pad and allow the area to dry.

**NOTE** Only one (1) 18" extension is included. Find a suitable mounting location that is within 18" from the horn cover.

**NOTE** You may wire the Zombie Horn cover into the switch for other Infinity products or seven-color lizard lights using Y-adapters (P/N 4712). The Zombie Horn cover equals a total of 4 lizard lights.

**STEP 3** Using the back of your fingernail rub the adhesive backing on the switch to activate the catalyst; remove the backing, press and hold the switch in place for one (1) minute, full bonding strength will occur in 24 hours.

**ATTENTION!** Ensure the area of installation is free of grease, oil, dirt or other debris to ensure proper adhesion. Kuryakyn WILL NOT warranty any parts lost due to improper installation.

**ATTENTION!** The adhesive will not bond correctly if applied at temperatures less than 50°F. Do not attempt this installation in temperatures less than 50°F.

**STEP 4** The black wire from the switch is a ground wire and needs to be secured to the negative terminal on the battery.

**STEP 5** The red wire from the switch (with in-line fuse) is a power wire and needs to be secured to the positive terminal on the battery.

**STEP 6** Apply a small amount of dielectric grease to the connections and plug the wiring harness from the zombie horn cover into the harness from the switch making sure that the red wire lines up from the switch, the extension and the Zombie Infinity Horn Cover.

**NOTE** Use the included extension as needed.

**ATTENTION!** Kuryakyn recommends the use of dielectric grease on electrical connections.

**STEP 7** Secure all wiring away from heat sources and or moving parts using the included cable ties. Melted wire insulation may result in a short circuit.

**ATTENTION!** Secure all wiring away from any moving parts, pinch points or extreme heat. Kuryakyn WILL NOT warranty any electrical component that fails due to pinched, crimped, broken, abraded, melted or frayed wires.

**STEP 8** Reinstall the seat or battery box cover.

**ATTENTION!** It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.

## CONTROLLER OPERATION


-cont.-

# Kuryakyn®

PIC. 1



PIC. 2

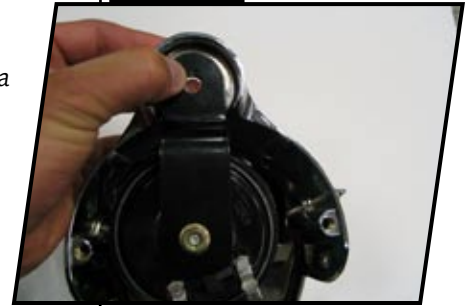

The controller has a rheostat, a toggle switch, and a push button.

- Use the toggle switch to select “STEADY ON” or “FLASH” modes or to turn the lights “OFF”.
- The push button allows the user to select the color they wish to illuminate. There are eight possibilities. The first seven options select an individual color. The eighth option is called “PAINT MODE” which continuously cycles the lights through all seven colors and is indicated by the white-colored light to initiate the Paint Mode.
- The rheostat varies the flash rate when illuminating a specific color in “FLASH” mode or varies the rate at which the lights cycle through all seven colors if “PAINT MODE” is selected.
- The color sequence is as follows:
  1. Red
  2. Lime
  3. Ice White
  4. Sky Blue
  5. Dark Blue
  6. Purple (Violet)
  7. Green
  8. Paint Mode (Continuously cycles through all seven colors)

*Ride On!*