

## INSTALLATION INSTRUCTIONS

### ATTO REAR TURN SIGNAL ADAPTERS FOR INDIAN®

**2842 CHROME OR 2843 GLOSS BLACK**

**THANK YOU FOR CHOOSING KURYAKYN!**

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

**⚠ WARNING** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

**⚠ CAUTION** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

**NOTICE**

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

#### ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

1	Right Top Mount	M4 x .7 x 12mm Socket Head Cap Screw
1	Right Bottom Mount	M8 x 1.25 Nut
1	Left Top Mount	M8 Split Lock Washer
1	Left Bottom Mount	3/8" Socket Driver Tool

#### YOU WILL ALSO NEED:

Metric hex wrench set, 13mm shallow socket, ratchet, 3/8" combo wrench, blue loctite

**NOTICE**

THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.


**STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let motorcycle cool.

THESE MOUNTS ARE USED WITH KURYAKYN BY KELLERMANN ATTO RB LIGHTS (P/N 2522, 2523, OR 2575; SOLD SEPARATELY), WHICH REQUIRE P/N 2568 ADAPTER STUDS (SOLD SEPARATELY, QTY 2 NEEDED) FOR PROPER INSTALLATION.

**STEP 2** Refer to PIC 2. Unfasten the rear turn signal bar, disconnect the turn signals, and remove the entire assembly from the rear fender. Disconnect turn signals from the assembly. Set mounting hardware and turn signal bar aside, they will be reused.

*Note: Refer to motorcycle's service manual for additional assists.*

**STEP 3** Locate the sold separately Kellermann light and adapter. Apply a small amount of blue loctite to the treads of the light and to the adapter. Feed the wire of the light through the adapter and secure it onto the light.

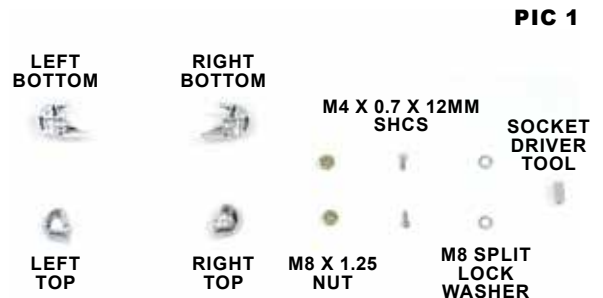

## INSTALLATION INSTRUCTIONS

### ATTO REAR TURN SIGNAL ADAPTERS FOR INDIAN®

-CONTINUED-

**STEP 4** Refer to PIC 3 through 5. Locate provided Right Top Mount and Bottom Mount, and one (1) M4 socket head cap screw. Apply a small amount of blue loctite to the threads of the screw.

**STEP 5** Place the atto light assembly into the right bottom mount. Align and place the top mount on top of the assembly, and secure all pieces together by using the screw.

**STEP 6** Locate OEM turn signal bar. Align the light and mount assembly with the OEM turn signal bar

**STEP 7** Refer to PIC 6. Locate provided split lock washer and nut. Feed the light's wires through the split lock washer and nut. Thread the nut onto the light's adapter.

**STEP 8** Locate 13mm socket. Feed the wire of the light through the socket.

**STEP 9** Refer to PIC 7. Locate provided Socket Driver Tool. Feed the wire of the light through the tool, and insert it into the socket. Secure the light to the turn signal bar. Fully tighten hardware, but use care to not over tighten.

**STEP 10** Refer to PIC 9. Repeat Steps 3 through 8 for the left side mount.


**STEP 11** Refer to the installation instructions that were provided with the light to complete the installation of the light to the motorcycle. Test for proper functionality before moving forward.

*Note: The Atto light has three wires. Only the ground wire (black) and high/bright (gray and red) wire will be used. Connect the black wire on the Atto light to the ground wire from the motorcycle's turn signal light. Connect the gray/red wire on the Atto light to the positive wire from the motorcycle's turn signal light. Use electrical tape to cover the remaining/ exposed Atto wire.*

**STEP 12** Reinstall the turn signal bar on the rear fender of the motorcycle using the hardware that was removed in Step 2. Fully tighten all hardware.

**⚠ WARNING**

**ENSURE PROPER LIGHT OPERATION BEFORE RIDING THE MOTORCYCLE. VISIBILITY IS A MAJOR CONCERN FOR MOTORCYCLISTS. A LIGHT MALFUNCTION COULD RESULT IN DEATH OR SERIOUS INJURY.**

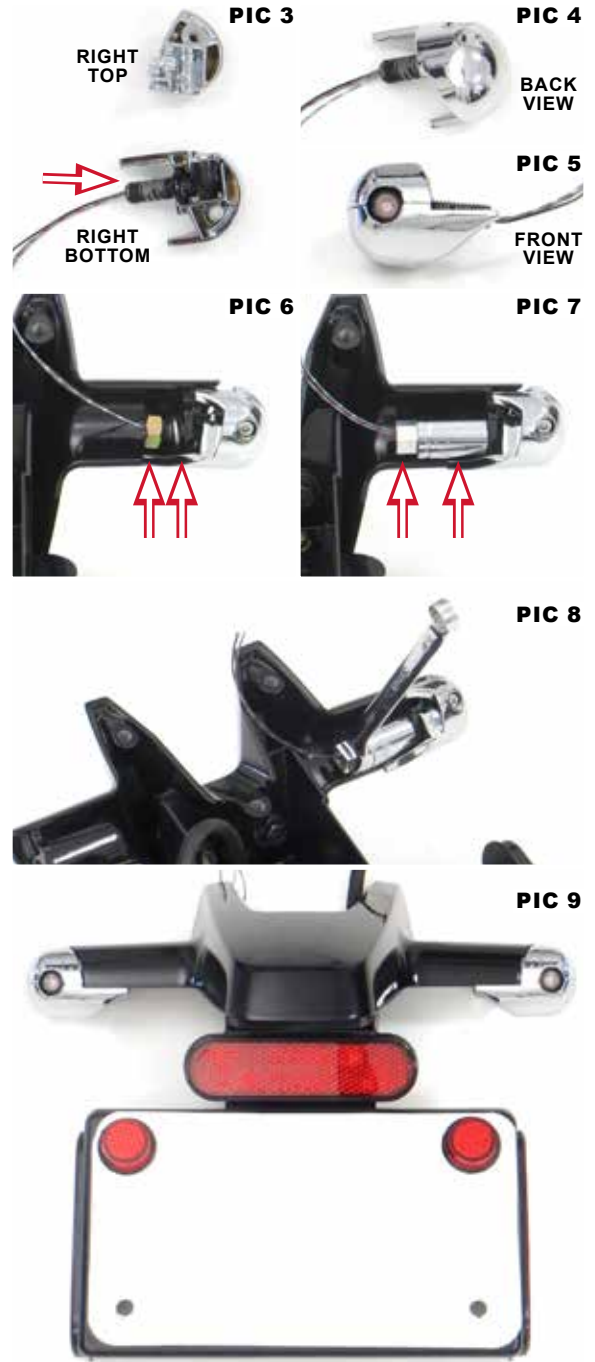

## INSTALLATION INSTRUCTIONS

### ATTO REAR TURN SIGNAL ADAPTERS FOR INDIAN®

-CONTINUED-

#### NOTICE

**IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT ALL OF THE FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.**

#### LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. All warranty claims must be directed to the place of purchase. Merchandise sold through internet auction sites or any other unauthorized reseller shall not carry a Kuryakyn warranty. If unsure, please contact the place of purchase to verify they are an authorized Kuryakyn reseller.

#### RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.

©2015 KURYAKYN HOLDINGS, LLC ALL RIGHTS RESERVED

KURYAKYN, KURYAKYN K logo and the marks appearing on this instruction sheet are registered and common law trademarks of Kuryakyn Holdings except noted third-party trademarks. A full listing of trademarks and trademark registrations owned by Kuryakyn Holdings can be found at [www.kuryakyn.com/legal-notice](http://www.kuryakyn.com/legal-notice).

Emissions Notice: The California Air Resources Board (CARB) does not permit the use of aftermarket emission-related parts(s) that alter the performance of OEM emission-related devices unless CARB has issued an Executive Order, other than on racing vehicles on closed courses. Check your local laws and manufacturer's information.

Listed Manufacturers and product model names are for reference only. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. All specifications are subject to change without notice.

For additional information on third-party product and company names, please consult our Web page at [www.kuryakyn.com/legal-notice](http://www.kuryakyn.com/legal-notice)