

INSTALLATION INSTRUCTIONS

RELOCATOR FOR TOUR-PAK® FOR '09-'13 TOURING & TRIKE

8957

THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

WARNING THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

NOTICE THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- | | | | |
|---|----------------------------|---|--------------------------------|
| 1 | Right-side Relocator Block | 1 | Hardware Kit, containing: |
| 1 | Left-side Relocator Block | 8 | 1/4" Flat Washers |
| | | 8 | 1/4" Lock Washers |
| | | 4 | 1/4"-20 X 7/8" Hex Head Screws |
| | | 4 | Cable Ties |

YOU WILL ALSO NEED:

Socket set and ratchet, combination wrenches, set of hex wrenches, set of hex sockets, in./lbs. torque wrench

NOTICE THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let motorcycle cool.

STEP 2 Unhook the CB cable (if equipped) located under the clutch-side (left) passenger armrest.

NOTICE AVOID DAMAGE TO THE MOTORCYCLE. PROTECT PAINTED SURFACES WITH A SOFT CLOTH OR BLANKET.

STEP 3 Open the Tour-Pak®. Refer to PIC 1. Remove the two acorn nuts located inside the document pouch in the Tour-Pak®. Remove the pouch.

STEP 4 Remove the trunk liner and set it aside.

NOTICE ASSISTANCE IS HIGHLY RECOMMENDED TO SECURE THE TOUR-PAK® AS THE MOUNTING SCREWS ARE BEING REMOVED.

STEP 5 Remove the four screws securing the Tour-Pak® to the mount. PIC 2 Set the screws aside for now; they will be reused later. Note the location of the ground strap; it will be re-installed later. PIC 2

STEP 6 Carefully move the Tour-Pak® out of the way. Have someone secure the Tour-Pak® while the Relocator Blocks are being installed.

STEP 7 Refer to FIG 1. Determine the Right-and Left-Hand Relocator Blocks. The countersunk holes are offset to ensure that they are installed on the correct side. The beveled edges face the front of the motorcycle.



KURYAKYN.COM

INSTALLATION INSTRUCTIONS

RELOCATOR FOR TOUR-PAK® FOR '09-'13 TOURING & TRIKE

8957

-CONTINUED-

STEP 8 Refer to PIC 3. Attach the clutch-side (left) Relocator Block to the OEM mount with two of the included 1/4"-20 Screws, Lock Washers and Flat Washers. Insert the screws through the countersunk holes. Leave the first screw loose until the other has been installed, then Torque the screws to 96 TO 100 IN./LBS.

STEP 9 Repeat STEP 8 for the brake-side (right). PIC 4

STEP 10 The Relocator allows for three different mounting positions over a range of about three inches.

Refer to FIG 1. Determine which of the three mounting positions will work best for you; 1", 2" or 3" back.

STEP 11 Add an included Lock Washer and Flat Washer to each screw (removed in STEP 5) and set them within arms reach of the work area.

STEP 12 Carefully position the Tour-Pak® over the Relocator Blocks. Align the holes in the Tour-Pak® with the threaded holes in the Blocks. Attach the Tour-Pak® to the Blocks with the screws from STEP 11. Leave the screws loose until all have been started in their threaded holes, then torque the screws to 96 to 100 in./lbs.

NOTICE ENSURE THAT THE GROUND STRAP (PIC 2) IS REATTACHED TO THE FLOOR OF THE TOUR-PAK® DURING REINSTALLATION.


STEP 13 Reinstall the Tour-Pak® liner.

STEP 14 Reinstall the document pouch and acorn nuts. Reinstall the CB cable (if removed).


STEP 15 Ensure the Tour-Pak® is secure before riding the motorcycle.

NOTICE IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT ALL OF THE FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.

FIG 1

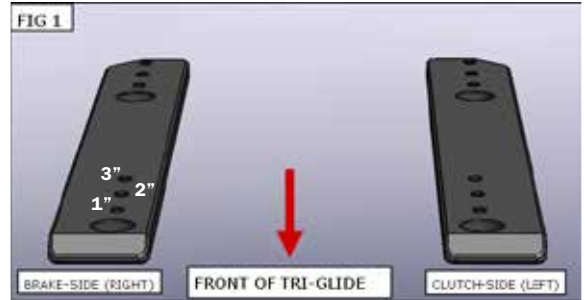

PIC 3

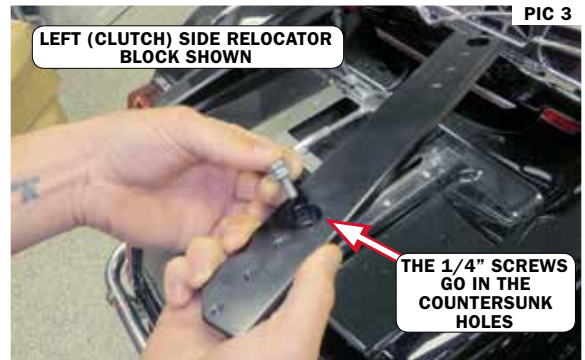

PIC 4



INSTALLATION INSTRUCTIONS

RELOCATOR FOR TOUR-PAK® FOR '09-'13 TOURING & TRIKE

8957

-CONTINUED-

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. All warranty claims must be directed to the place of purchase. Merchandise sold through internet auction sites or any other unauthorized reseller shall not carry a Kuryakyn warranty. If unsure, please contact the place of purchase to verify they are an authorized Kuryakyn reseller.

RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.

©2015 KURYAKYN HOLDINGS, LLC ALL RIGHTS RESERVED

KURYAKYN, KURYAKYN K logo and the marks appearing on this instruction sheet are registered and common law trademarks of Kuryakyn Holdings except noted third-party trademarks. A full listing of trademarks and trademark registrations owned by Kuryakyn Holdings can be found at www.kuryakyn.com/legal-notice.

Emissions Notice: The California Air Resources Board (CARB) does not permit the use of aftermarket emission-related parts(s) that alter the performance of OEM emission-related devices unless CARB has issued an Executive Order, other than on racing vehicles on closed courses. Check your local laws and manufacturer's information.

Listed Manufacturers and product model names are for reference only. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. All specifications are subject to change without notice.

For additional information on third-party product and company names, please consult our Web page at www.kuryakyn.com/legal-notice